

9230 Pressure Balanced Thermostatic Mixing Valve



APPLICATION

Suitable for hospitals, nursing homes and child care centres. This unit is designed to deliver tempered water to single or multi point installations without the risk of unauthorised persons altering the preset temperature or flow.

INSTALLATION

Mixer is fitted with 15mm BSP inlet nipple.

FEATURES

- Thermostatic temperature control and pressure balancing control all in one cartridge.
- Inbuilt non return valves and filters.
- Fixed temperature knob.
- No flow control knob.
- Can be supplied pre-plumbed in a stainless steel box
- Always a constant temperature of + or - 1°C.
- Factory pre-set to 38°C (can be re-calibrated by plumber).
- Operates from Min 50kPa to Max 1000kPa.
- Recommended working pressure 100kPa to 500kPa.
- 10 year warranty on cartridge.
- Made in Sweden.

OPTIONS

Refer to Optional Items and Accessories for details.

COLOURS

Valve - Raw brass
Temperature knob - Red



APPROVALS AS4032/4 & NSW HEALTH DEPARTMENT

Manufactured in DR brass

CODES

9230-8070

* Bath/Shower/Basin/Multi-Point Application

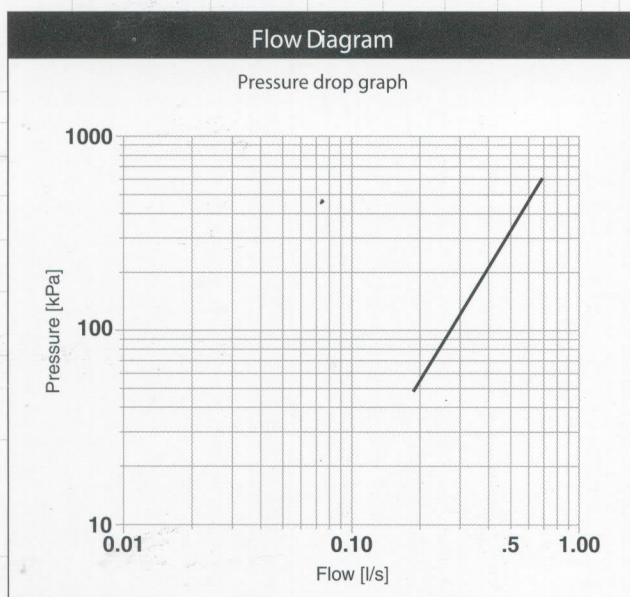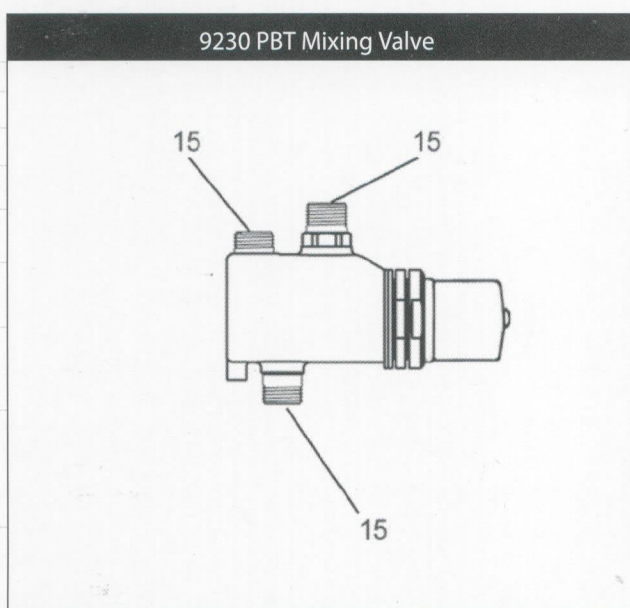

Flow Table	
Pressure(kPa)	Flow (l/min)
100	15.5
200	22.5
300	28
400	32.5
500	36.5
600	40.3



T: (03) 9399 8444 F: (03) 9399 8446 E: sales@magriffith.com.au W: www.magriffith.com.au

FM Mattsson
- Different on the inside

Technical Specifications