

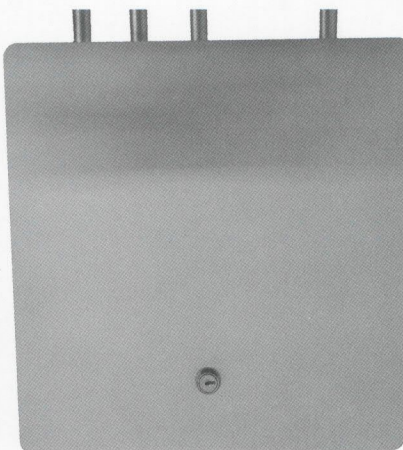
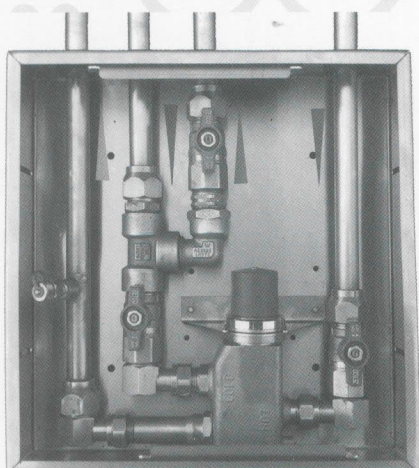


9230 Pre-plumbed Pressure Balanced Thermostatic Mixing Valve (300X300X75mm Stainless Steel Box)

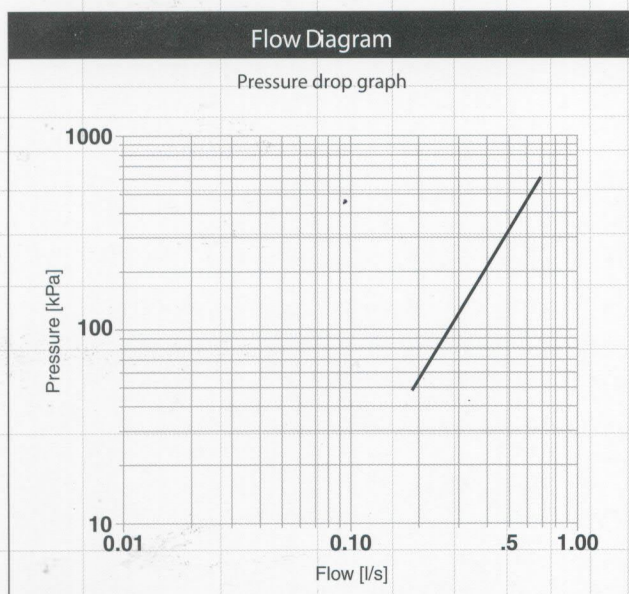

* Refer to pages 10, 11 and 12 for complete range of plumbing configurations in our stainless steel boxes.

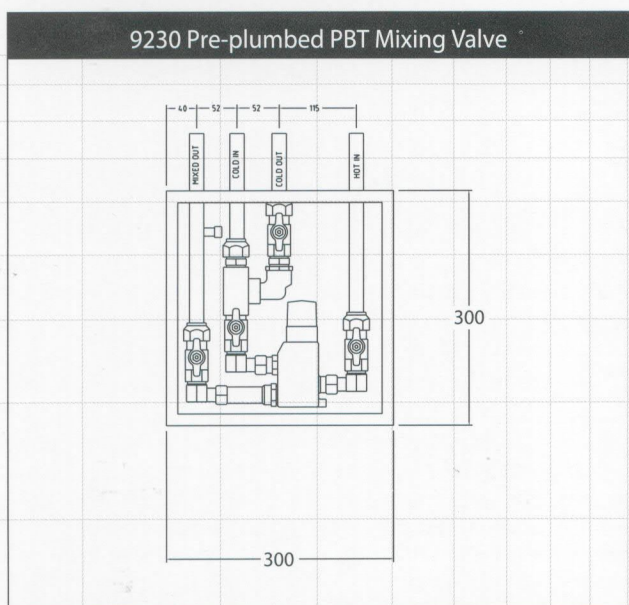

APPLICATION

Suitable for hospitals, nursing homes and child care centres and public areas. This unit is designed to deliver tempered water to single or multi point installations without the risk of unauthorised persons altering the preset temperature or flow.

INSTALLATION

The 9230 valve has been pre-plumbed with 20mm isolating ball valves and pipework and comes supplied in high quality stainless steel box (300 x 300 x 75mm) for concealed and exposed installation.

FEATURES

- Utilises the 9230 Pressure Balanced Thermostatic Bath/Shower/Mixer (with fixed temperature knob).
- The box has been purposely designed with pilot holes for easy fixing to stud work and 100mm extended pipes for joining to existing pipe work.
- Branch in cold water inlet pipe with 20mm ball valve to enable continuous supply of cold water whilst the mixer is being serviced.
- Binder Test Point for easy calibration.
- Lockable lid is keyed alike.
- Operates from Min 50kPa to Max 1000kPa.
- Recommended working pressure 100kPa to 500kPa.
- Made in Sweden.

APPROVALS AS4032/4 & NSW HEALTH DEPARTMENT

Manufactured in DR brass

* Bath/Shower/Basin/Multi-Point Application

FM Mattsson

- Different on the inside

Technical Specifications