


# 9690 Pressure Balanced Thermostatic Shower Mixer

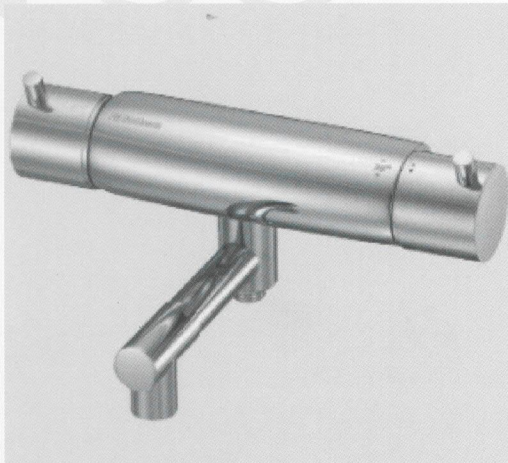

## APPLICATION

Suitable for domestic bathroom outlets, photo labs, hair dressing salons or food processing. For use anywhere a constant temperature is required. Shower mixer comes with 15mm BSP hand shower connection.

## INSTALLATION

The valve is fitted with 19mm BSP connection nuts and requires pipework to be set at 150-153 c/c.

## FEATURES

- Thermostatic temperature control and pressure balancing control in one cartridge.
- "Child" safety lock prevents unintentional temperature increases.
- No more unpleasant showers, always a constant temperature + or -1°C.
- Factory pre-set to 38°C (can be re-calibrated by plumber).
- Comes with check valves and line strainers.
- Operates from Min 50kPa to Max 1000kPa.
- Recommended working pressure 100kPa to 700kPa.
- 10 year warranty on cartridge.
- Made in Sweden.

## OPTIONS

Refer to Optional Items and Accessories for details.

## COLOURS

Chrome


## APPROVALS AS4032

Manufactured in DR brass

## CODES


9690 - 7070

9690 PBT Shower Mixer

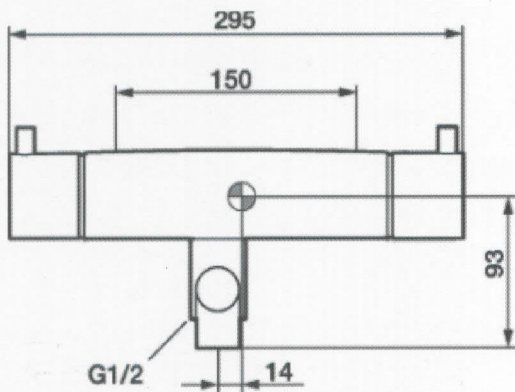

Flow Diagram

Pressure drop graph

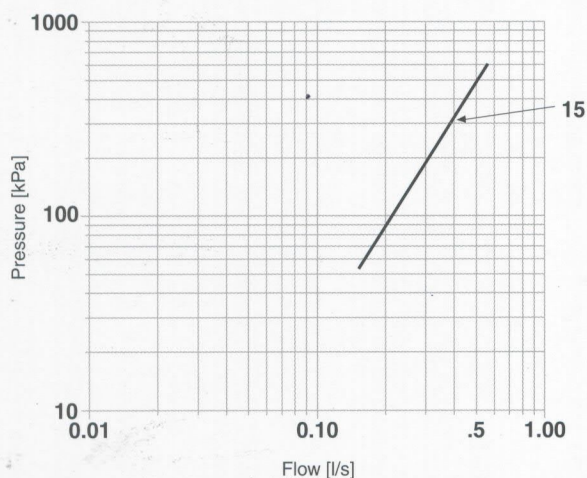

Flow Table

Pressure(kPa)	Flow (l/min)
100	14
200	20
300	24
400	27
500	31
600	34