


9210 Pressure Balanced Thermostatic Shower Mixer

FM Mattsson
- Different on the inside



9210 Pressure Balanced Thermostatic Shower Mixer

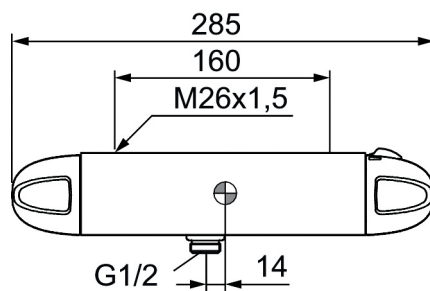

Flow Table

Pressure (kPa)	Flow (l/min)
100	14
200	20
300	24
400	27
500	31
600	34

BENEFITS

- FM Mattsson unique valve technology is the ONLY valve on the market that can cope with sudden pressure peaks and fluctuating temperatures.
- Minimum flow rate as low as 1L per minute.
- Pressure Balancing Piston ensures accurate constant temperature within +/- 1°C no matter what happens in the pipework.
- “Built-in” Pressure Balancing Piston function also provides additional safety against scalding.
- Thermostatic temperature control and pressure balancing control all in one simple cartridge design.
- Exceptional safety, performance and superior quality to all other brands.

APPLICATION

Suitable for domestic bathrooms, hair dressing salons, food processing, hydrotherapy facilities and other installations where a constant temperature is required.

Exposed shower mixer comes with flow control and adjustable temperature control to deliver perfectly constant temperature within +/- 1°C.

SPECIFICATIONS / INSTALLATION

- Shower mixer comes with 15mm BSP hand shower connection.
- Valve fitted with 20mm BSP connection nuts and requires pipework to be set at 150-153 c/c.
- Safety lock feature prevents unintentional temperature changes.
- Comes with check valves and line strainers.
- Simple cartridge design - easy to maintain.
- Factory pre-set to 38°C (can be re-calibrated by licensed plumber).
- Operates from Min 50kPa to Max 1000kPa. Recommended working pressure 100kPa to 500kPa.
- 5 year warranty on cartridge.
- Made in Sweden.

COLOURS Chrome.

PRODUCT CODE 9210-7070



WaterMark

Licence No: WM-1186



www.magriffith.com.au
T (03) 9399 8444 F (03) 9399 8446 E sales@magspp.com.au