


9220 Concealed Pressure Balanced Thermostatic Bath or Shower Mixer (Flow Control and Adjustable Temperature)

FM Mattsson
- Different on the inside

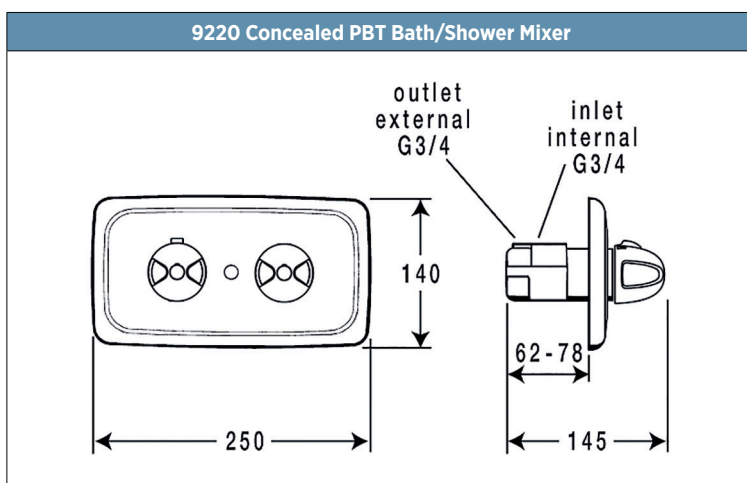

Flow Table	
Pressure (kPa)	Flow (l/min)
100	16.5
200	23.5
300	29
400	33
500	37
600	40.5

BENEFITS

- FM Mattsson unique valve technology is the ONLY valve on the market that can cope with sudden pressure peaks and fluctuating temperatures.
- Minimum flow rate as low as 1L per minute.
- Pressure Balancing Piston ensures accurate constant temperature within +/- 1°C no matter what happens in the pipework.
- “Built-in” Pressure Balancing Piston function also provides additional safety against scalding.
- Thermostatic temperature control and pressure balancing control all in one simple cartridge design.
- Exceptional safety, performance and superior quality to all other brands.

APPLICATION

Suitable for bath or shower installations. Comes with flow control and adjustable temperature control to deliver perfectly constant temperature within +/- 1°C.

SPECIFICATIONS / INSTALLATION

- Fits into 62mm-78mm stud wall.
- Comes with G3/4” (20mm) inlets and outlets.
- Safety lock feature prevents unintentional temperature changes.
- Simple cartridge design - easy to maintain.
- Comes with check valves and line strainers.
- Factory pre-set to 38°C (can be re-calibrated by licensed plumber).
- Operates from Min 50kPa to Max 1000kPa. Recommended working pressure 100kPa to 500kPa.
- 5 year warranty on cartridge.
- Made in Sweden.

COLOURS

Chrome.

PRODUCT CODE

9220-7070



WaterMark

Licence No: WM-1186

