


9250 Pressure Balanced Thermostatic Shower Mixer

FM Mattsson
- Different on the inside



9250 Pressure Balanced Thermostatic Shower Mixer

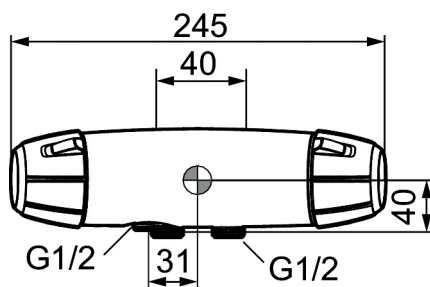

Flow Table	
Pressure (kPa)	Flow (l/min)
100	14
200	20
300	24
400	27
500	31
600	34

BENEFITS

- FM Mattsson unique valve technology is the ONLY valve on the market that can cope with sudden pressure peaks and fluctuating temperatures.
- Minimum flow rate as low as 1L per minute.
- Pressure Balancing Piston ensures accurate constant temperature within +/- 1°C no matter what happens in the pipework.
- “Built-in” Pressure Balancing Piston function also provides additional safety against scalding.
- Thermostatic temperature control and pressure balancing control all in one simple cartridge design.
- Exceptional safety, performance and superior quality to all other brands.

APPLICATION

Suitable for hospitals, nursing homes, child care centres, hydrotherapy facilities, hair dressing salons and other installations requiring a constant temperature. Exposed shower mixer comes with flow control and temperature control to deliver perfectly constant temperature within +/- 1°C.

SPECIFICATIONS / INSTALLATION

- Mixing valve is fixed to the wall by a removable wall adapter. External fitting.
- 15mm BSP inlets and outlets provided.
- Ideal for retro fitting.
- Safety lock feature prevents unintentional temperature changes.
- Comes with check valves and line strainers.
- Simple cartridge design - easy to maintain.
- Factory pre-set to 38°C (can be re-calibrated by licensed plumber).
- Operates from Min 50kPa to Max 1000kPa. Recommended working pressure 100kPa to 500kPa.
- 5 year warranty on cartridge.
- Made in Sweden.

COLOURS Chrome.

PRODUCT CODE 9250-7070



WaterMark

Licence No: WM-1186



www.magriffith.com.au
T (03) 9399 8444 F (03) 9399 8446 E sales@magspp.com.au