


# 9220 Concealed Pressure Balanced Thermostatic Bath or Shower Mixer (With Flow Control & Adjustable Temperature)

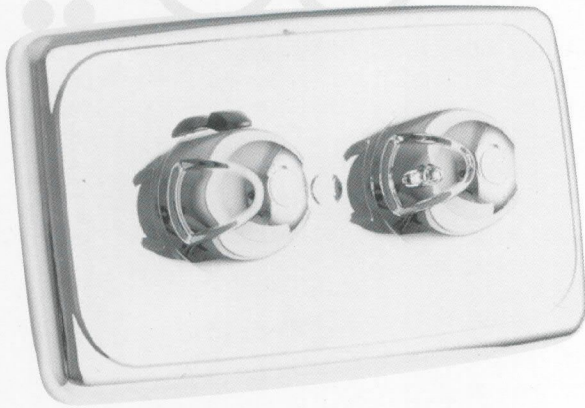

## APPLICATION

Suitable for Bath or Shower, comes with flow control and temperature control with automatic pressure balancing control. For use anywhere a constant temperature is required.

## INSTALLATION

Fits into 62mm - 78mm stud wall.  
Comes with G3/4" inlets and outlets.

## FEATURES

- Thermostatic temperature control and pressure balancing control in one cartridge.
- "Child" safety lock prevents unintentional temperature increases.
- No more unpleasant showers, always a constant temperature + or - 1°C.
- Factory pre-set to 38°C (can be re-calibrated by plumber).
- Operates from Min 50kPa to Max 1000kPa.
- Recommended working pressure 100kPa to 700kPa.
- 10 year warranty on cartridge.
- Made in Sweden.

## OPTIONS

Refer to Optional Items and Accessories for details.

## COLOURS



Chrome

## APPROVALS AS4032

Manufactured in DR brass

## CODES

9220-7070

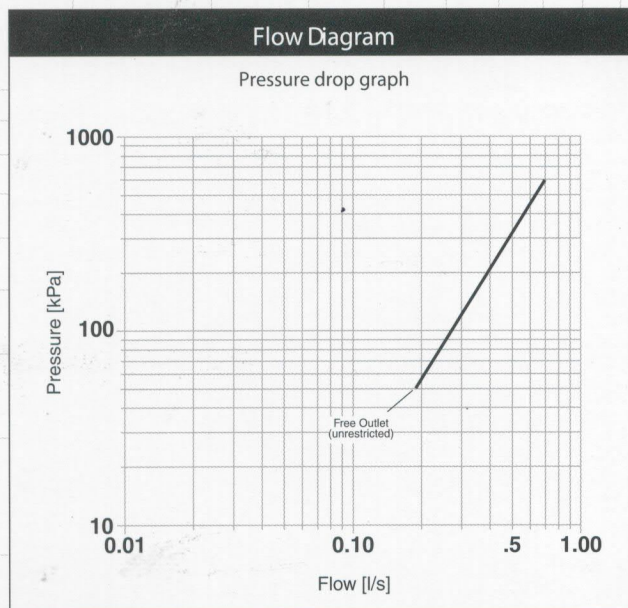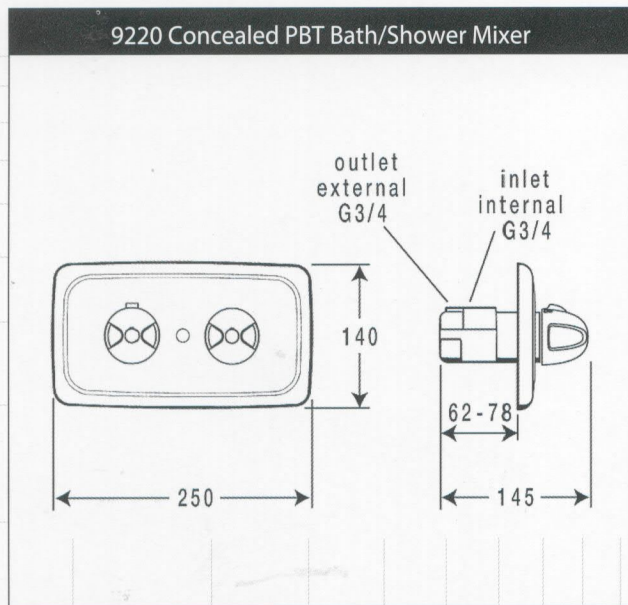

| Flow Table    |              |
|---------------|--------------|
| Pressure(kPa) | Flow (l/min) |
| 100           | 16.5         |
| 200           | 23.5         |
| 300           | 29           |
| 400           | 33           |
| 500           | 37           |
| 600           | 40.5         |

**FM Mattsson**  
*- Different on the inside*

Technical Specifications



T: (03) 9399 8444 F: (03) 9399 8446 E: sales@magriffith.com.au W: www.magriffith.com.au