


9250 Pressure Balanced Thermostatic Shower Mixer

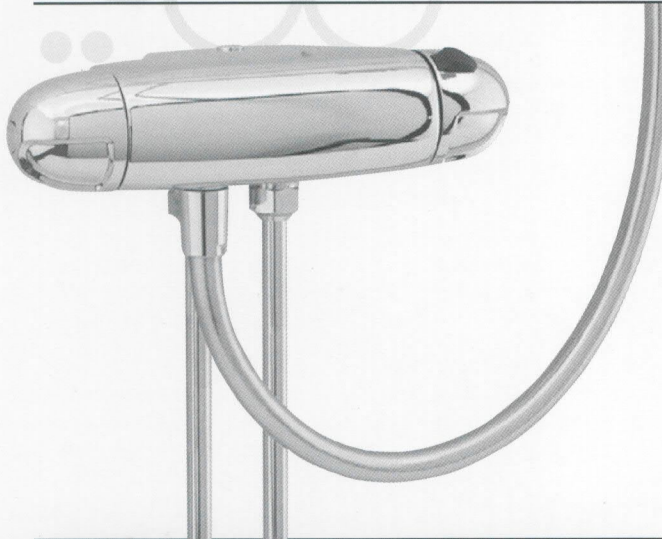

APPLICATION

Suitable for hospitals, nursing homes and child care centres. Shower mixer comes with 15mm BSP hand shower connection. Ideal for hair dressing salons or anywhere a constant temperature is required.

INSTALLATION

Mixing valve is fixed to the wall by a removeable wall adapter. 15mm BSP inlets and outlets. Ideal for retro fitting.

FEATURES

- Thermostatic temperature control and pressure balancing control in one cartridge.
- "Child" safety lock prevents unintentional temperature increases.
- No more unpleasant showers, always a constant temperature + or -1°C.
- Factory pre-set to 38°C (can be re-calibrated by plumber).
- Comes with check valves and line strainers.
- Operates from Min 50kPa to Max 1000kPa.
- Recommended working pressure 100kPa to 700kPa.
- 10 year warranty on cartridge.
- Made in Sweden.

OPTIONS

Refer to Optional Items and Accessories for details.

COLOURS


Chrome

APPROVALS AS4032/4


Manufactured in DR brass

CODES

9250-7070

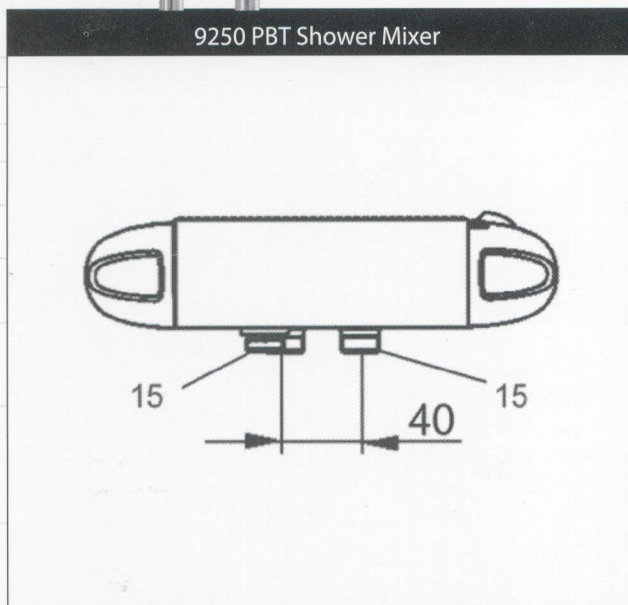

9250 PBT Shower Mixer

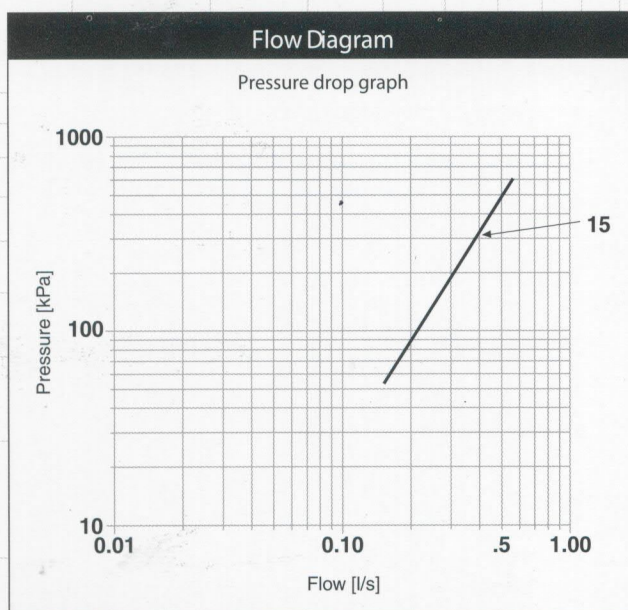

Flow Diagram

Pressure drop graph

Flow Table	
Pressure(kPa)	Flow (l/min)
100	14
200	20
300	24
400	27
500	30
600	33